
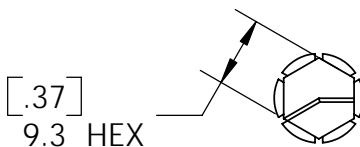

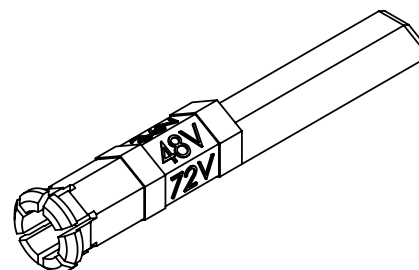



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

Copyright 2005

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.

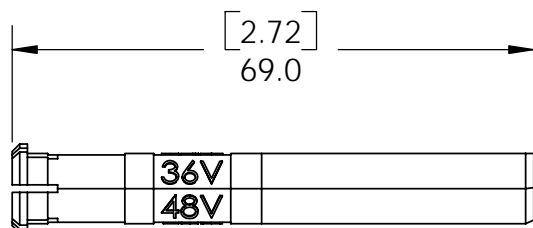

VOLTAGE ORIENTATION
36V
48V
72V
96V
80V
24V

DIMENSIONS ARE IN:		INCH[MM]	MM[INCH]	APPROVALS		ANDERSON POWER PRODUCTS			
UNLESS OTHERWISE STATED				DRAWN	AMP	6/8/05	 SALES OUTLINE UNIVERSAL VOLTAGE KEY FOR 160A & 320A DIN CONNECTORS		
TOLERANCES:				CHECKED	DJD	6/9/05			
DECIMALS (INCH)	DECIMALS (MM)	ANGLES		MFG APP	CHB	6/8/05			
XX ± .02	X ± .5	± 2°		QC APP	JJA	6/9/05			
SURFACE FINISH:				ENG APP	DAM	6/8/05	SIZE	DWG NO.	REV.
MACHINED		128 [3.2] ✓				A/A4	160-19S1	0	
MOLDED		64 [1.6] ✓							
MATERIAL:						SCALE		CADFILE	SHEET
NYLON						NONE		02365	1 OF 1
FINISH:									
N/A									
*****				-CAD GENERATED DRAWING- DO NOT MANUALLY UPDATE DO NOT SCALE					
REV.	DESCRIPTION OF CHANGES			APPROVED	DATE				

