


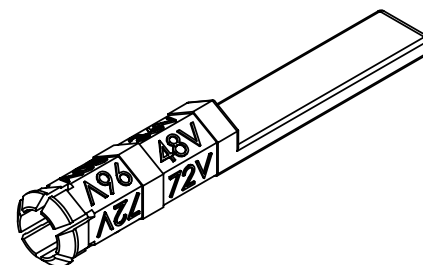



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

Copyright 2005

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.

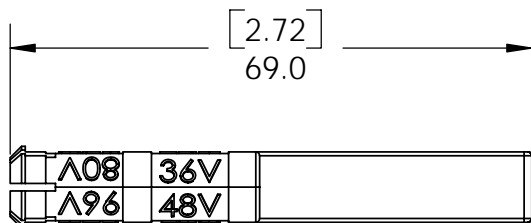

VOLTAGE ORIENTATION
24V - 24V
36V - 80V
48V - 96V
72V - 72V
96V - 48V
80V - 36V

DIMENSIONS ARE IN:	INCH[MM]	MM[INCH]	APPROVALS		 <b>ANDERSON POWER PRODUCTS</b>		
	UNLESS OTHERWISE STATED		DRAWN	AMP 6/8/05		<b>TITLE</b>  SALES OUTLINE STANDARD VOLTAGE KEY FOR 160A & 320A DIN CONNECTORS	
TOLERANCES:			CHECKED	DJD 6/9/05			
DECIMALS (INCH)	DECIMALS (MM)	ANGLES	MFG APP	CHB 6/8/05			
XX ± .02	X ± .5	± 2°	QC APP	JJA 6/9/05			
SURFACE FINISH:			ENG APP	DAM 6/8/05	SIZE	DWG NO.	REV.
MACHINED	128 [3.2]	✓			A/A4	160-9S1	0
MOLDED	64 [1.6]	✓					
MATERIAL:					SCALE	CADFILE	SHEET
NYLON					NONE	02363	1 OF 1
FINISH:							
N/A							
			-CAD GENERATED DRAWING- DO NOT MANUALLY UPDATE DO NOT SCALE				

REV.	DESCRIPTION OF CHANGES	APPROVED	DATE
*	*****	***	*****

