


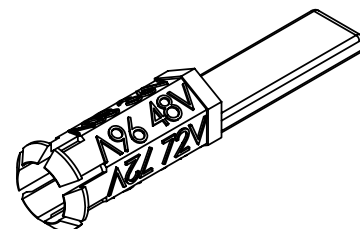



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

Copyright 2006

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.

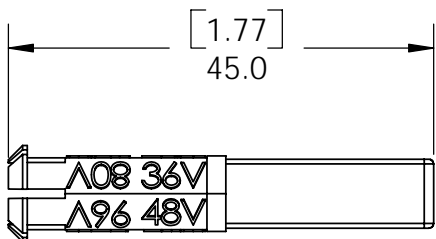

VOLTAGE ORIENTATION
24V - 24V
36V - 80V
48V - 96V
72V - 72V
96V - 48V
80V - 36V

DIMENSIONS ARE IN:		INCH[MM]	MM[INCH]	APPROVALS		ANDERSON POWER PRODUCTS			
UNLESS OTHERWISE STATED				DRAWN	AMP	6/8/05	 SALES OUTLINE STANDARD VOLTAGE KEY FOR 80A DIN CONNECTORS		
TOLERANCES:				CHECKED	DJD	6/9/05			
DECIMALS (INCH)	DECIMALS (MM)	ANGLES		MFG APP	CHB	6/8/05			
XX ± .02	X ± .5	± 2°		QC APP	JJA	6/9/05			
SURFACE FINISH:				ENG APP	DAM	6/8/05	SIZE	DWG NO.	REV.
MACHINED		128 [3.2]				A/A4	80-9S1	1	
MOLDED		64 [1.6]							
MATERIAL: NYLON						SCALE		CADFILE	SHEET
FINISH: N/A						NONE		02366	1 OF 1
3rd ANGLE PROJECTION				1st ANGLE PROJECTION		-CAD GENERATED DRAWING- DO NOT MANUALLY UPDATE DO NOT SCALE			

1	ECRN 13947 - CHANGE HEX FROM 9.3 TO 8.0	AMS	01/20/06
REV.	DESCRIPTION OF CHANGES	APPROVED	DATE

